


Generator set

Sound-proof type

GMS200CS-AU

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- China Compulsory Certification (CCC)
- ISO8528-5:2005
- GB/T2820.5-2009
- AS 3000-1997
- AS 3010.1-1988

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 45°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 90%.
- Altitude: Below one thousand (1000) meters above sea level.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Cummins engine 6CTAA8.3-G2
- Close coupled to a LSA alternator LSA44.3VL14
- Microprocessor control module PLC-7420
- ABB main circuit breaker: 320A
- Rotate speed governor: Electrical governor S6700E
- Excitation System: PMG
- A.V.R. Model: MX341
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle

- Remote run connextor
- 2x12V/120AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Oil pump on the engine
- Non-returning valve for fuel inlet hose of the engine
- Steel base frame with forklots
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 24 hours running
- Drain points for fuel tank
- Breather valve for fuel tank
- Operation Manual / Specifications

3 Equipment Specification

General technical data

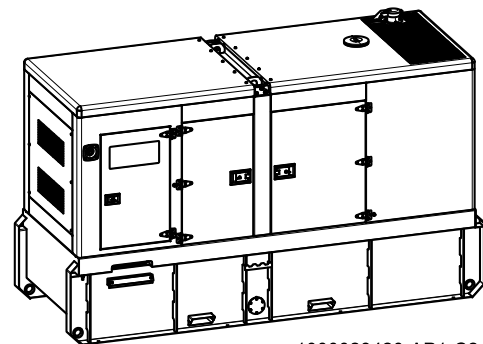


1000023420-AP1-C2

Model..... GMS200CS-AU
Structure type R
Tank capacity..... 1330L
Dry weight..... 2959kg
Sound pressure level @ 7m 74.2dBA
Dimensions L×W×H..... 3592x1322x2148mm
Standby Power 220kVA/176kW
Prime Power 200kVA/160kW
Voltage/Ampere..... 415V/278A

Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	13.5	23.3	34.0	45.4	51.4


Diesel Engine

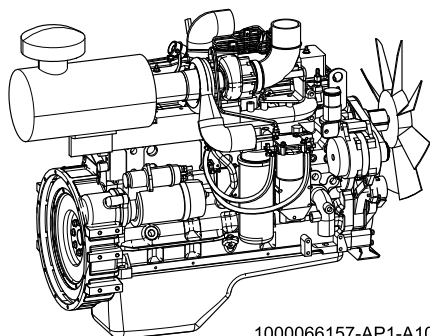

1000066157-AP1-A10

Engine Manufacturer/Brand	Cummins
Engine Model	6CTAA8.3G2
Dimensions L×W×H	1485.3*866.5*1245.0
Dry Weigh (approx.)	702kg
Number of Cylinders	6
Bore	114mm
Stroke	135mm
Displacement	8.3L
Compression Ratio	N/A
Type of injection	Direct injection
Intake System	Turbocharged, water-to-air charge cooled
Intake Resistance	≤6.28kPa
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	12/24V
Type of Fuel	Diesel
Type of Oil	ACEA E2, API CF, CF-4, CG-4
Oil Capacity	18.9L
Type of Coolant	Glycol mixture
Coolant Capacity	45.3L
Back Pressure	≤10.1kPa
Heat Rejected To Exhaust System ...	123kW(6999BTU/min)
Heat Rejected To Water&Lube Oil	83kW(4723BTU/min)
Standby Power	203kW
Prime Power	183kW
Fuel Consumption(100%load)	45.4L/h


Alternator



1000077827-AP1-A1

Alternator Manufacturer/Brand	Leroy Somer
Alternator Model	LSA44.3VL14
Exciter	Brushless
Cooling Fan	Cast alloy aluminum
Windings	100% copper
Insulation Class	H
Winding Pitch	2/3
Terminals	12
Drip Proof	IP23
Altitude	≤1000m
Overspeed	2250rpm
Air Flow	0.514m³/s(50Hz), 0.617m³/s(60Hz)
Voltage Regulation	±1.0%
Total Harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference	THF<2%; TIF<50

PLC-7420 Control System

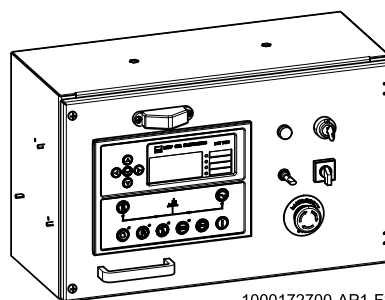

1000172700-AP1-F2


PLC-7420 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol




4 Overall Dimensions

1000023420-DR1-C2


Dry weight	2959kg
Fuel tank capacity	1330L
Dimensions L x W x H	3592x1322x2152mm

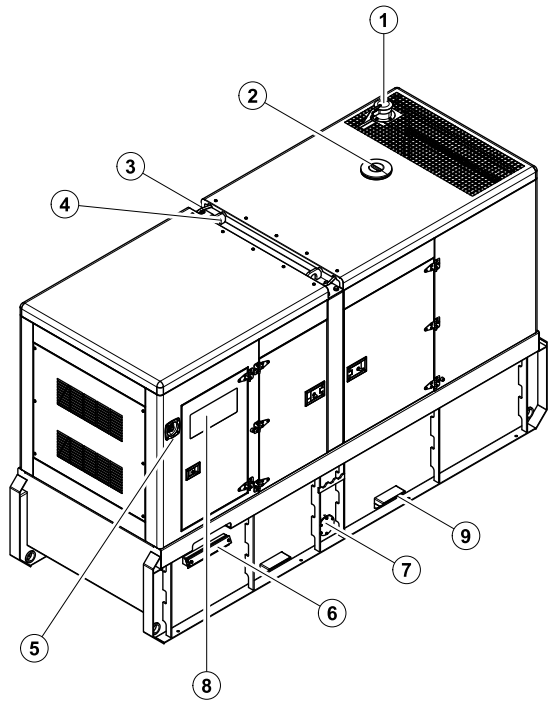


- ⑦ Fuel drain
- ⑥ Cable trench
- ⑤ Emergency stop switch
- ④ Lifting lug
- ③ Roping lug
- ② Coolant inlet
- ① Exhaust gas outlet
- ⑭ Air inlet
- ⑬ Coolant drain/
External fuel inlet/return hose fitting
- ⑫ Base frame
- ⑪ Oil drain hose fitting
- ⑩ Tie down
- ⑨ Fork lift channel
- ⑧ Control cabinet

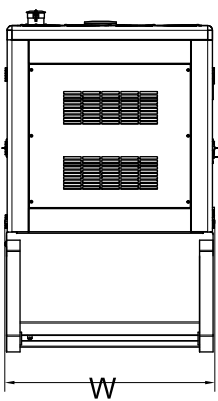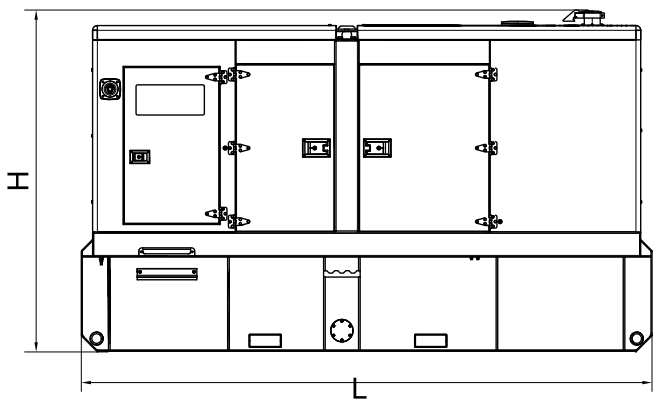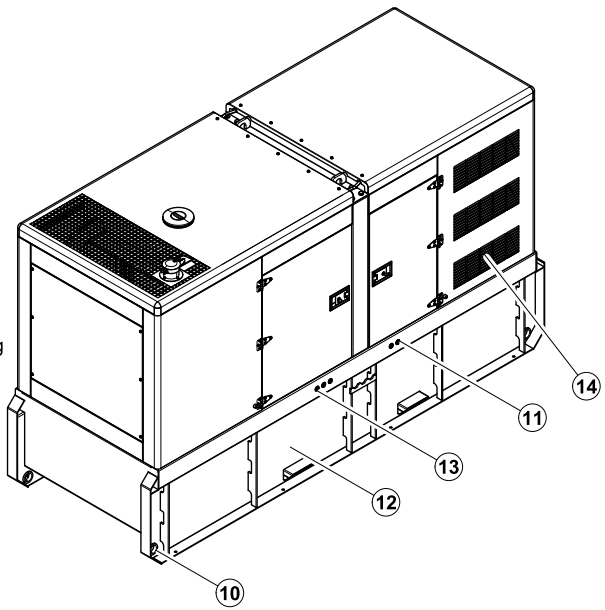

5 Control System

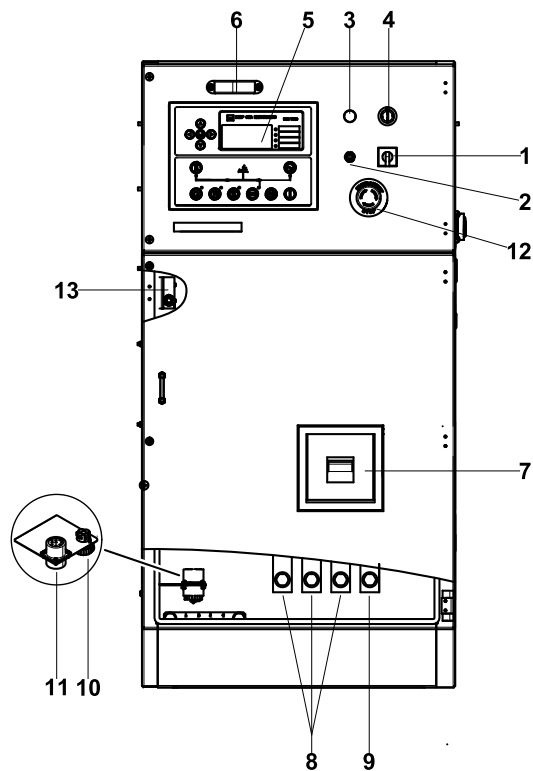

Control & Field wiring cabinet

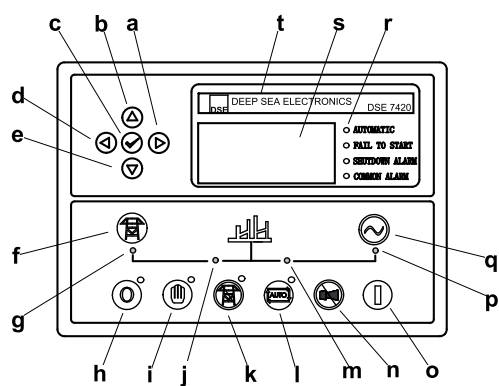


Control module

Ref.	Description
1	Mains input changeover switch
2	Control cabinet lamp switch
3	Charge indicator
4	Key switch
5	Control module
6	Control cabinet lamp
7	Main circuit breaker
8	Live wire terminals
9	Neutral wire terminal
10	Mains input/Remote control communication connector
11	Mains input/Remote control/ATS communication connector
12	Emergency stop switch
13	Limit switch

a	Button (next page)
b	Button (increase value / previous item)
c	Button (accept)
d	Button (previous page)
e	Button (decrease value / next item)
f	Button (transfer the load to the mains supply, when in Manual mode only)
g	Mains supply available LED
h	Stop / Reset button
i	Manual button (Manual control mode)
j	Mains supply on load LED
k	Test button (Test mode)
l	Auto button (Auto mode)
m	Genset on load LED
n	Mute/Lamp test button
o	Start button (Manual)
p	Genset available LED
q	Button (transfer the load to the genset, when in Manual mode only)
r	Alarm LED (4 alarm items)
s	LCD display
t	Control module name

6 Derate Curves

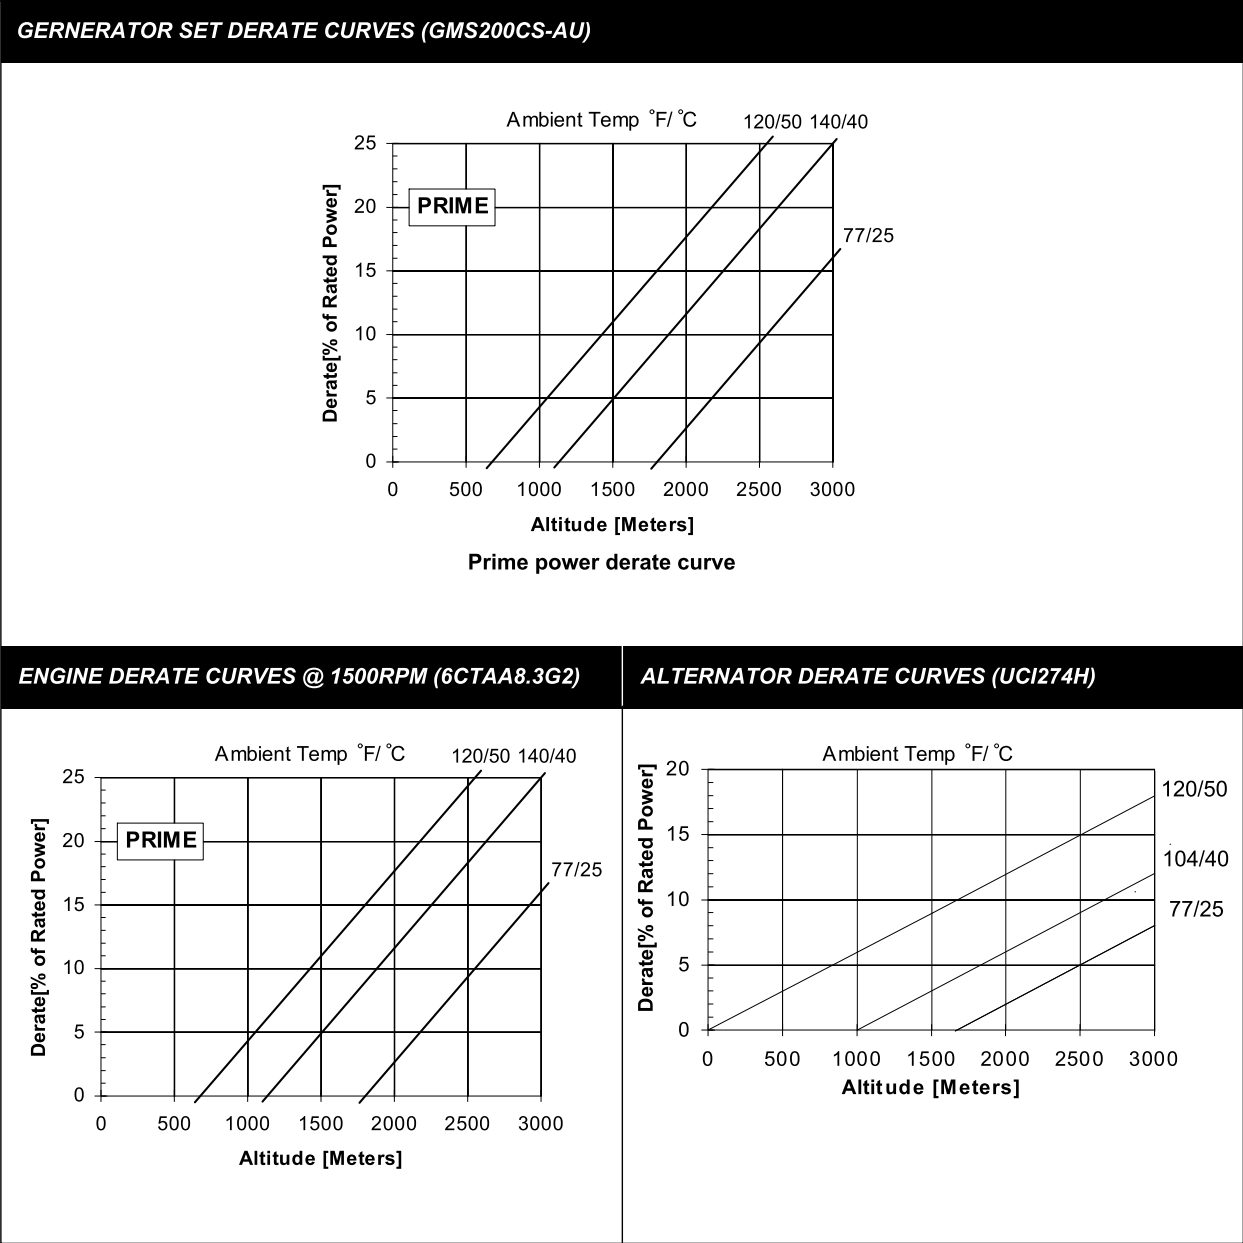

1000030743-F2-E
10.2020